

### Speed Gate

# **ID GATE 8700 DUAL**




#### PRODUCT DESCRIPTION

The Speed Gate ID GATE 8700 DUAL is a versatile access control solution that can be used in a variety of applications. In gyms, spas, and health centers, the ID GATE 8700 can be utilized to restrict access and enhance security.

Thanks to its innovative technology, the ID GATE 8700 DUAL provides fast processing and control of access to protected areas, creating a safe environment for visitors and authorized personnel.

Additionally, the system can be expanded to accommodate multiple access points if needed.

### **DIMENSIONS**

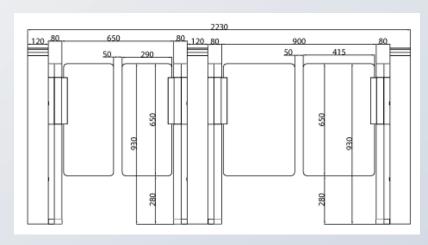

#### **HIGHLIGHTS**

- Long-lasting performance, high operational reliability and fast response
- One-sided or two-sided operation
- Automatic reset function
- Automatically opening wing door, which in emergency situations (eg, power failure or fire alarm).
- · Guarantee a free passage
- Integrated LED indicators show the throughput direction
- Integrated infrared sensors for alarm functions
- Fast opening and closing speed of 0.2 seconds
- · 3 year warranty

#### **Accessories (Optional)**

- · iDTRONIC R840 Ethernet
- QR Code Reader ID Ident 1500/2000
- Remote Control (Wired / Wireless)
- 3rd party reader installation (z.B. MIFARE, LEGIC, EM, HID etc.)



### **TECHNICAL DATA**

SPECIFICATION			
Passage Width	600 mm (Standard), 900 mm, 1200 mm		
Material	Stainless steel, acrylic glass wing doors and tempered toughened glass		
Power Supply	AC230V/110V, 50/60Hz		
Power Consumption	90-100W		
Operating Voltage	24V DC		
Throughput Frequency	55 people per minute		
Emergency Mechanimus	Hinged doors open automatically		
Communication Interface	relay signal		
Operating Temperature	-20 °C up to 75 °C		
Protection Class	IP65 (for indoor and outdoor use)		
Scope of Delivery	<ul> <li>Stainless steel Turnstile</li> <li>Glas / Acrylic Glas</li> <li>Anchor Bolts (M12) + nuts</li> <li>Wired remote control (for testing only)</li> <li>Cleaning kit</li> </ul>		

### **DIMENSIONS**

DIME		-	
	$\sim$	17 71	VI C:

Glass Panels

Standard:

• 300x650 mm (600mm passage width; 950mm height)

• 425x650 mm (900mm passage width; 950mm height)

300x1000 mm (600mm passage width; 1300mm height)

• 425x1000 mm (900mm passage width; 1300mm height)

Acrylic glass on request

## **ACCESSORIES (OPTIONAL)**

#### PRODUCT ACCESSORIES

Accessories (Optional)

- iDTRONIC R840 Ethernet
- QR Code Reader ID Ident 1500/2000
- Remote Control (Wired /Wireless)
- 3rd party reader installation (z.B. MIFARE, LEGIC, EM, HID etc.)