

Swing Gate

GATE 2400




PRODUCT DESCRIPTION

The ID SWING GATE 2400 is a versatile access control solution for various application areas. It is used, among other things, in office buildings, airports, train stations, stadiums, and museums to grant access to authorized individuals and restrict access to specific areas.

The Swing Gate offers a reliable and flexible solution for access control, ensuring a safe and controlled environment in various areas. Whether used as an entrance for employees in office buildings or for controlling access to museums, the ID SWING GATE 2400 is an excellent solution for access control.

DIMENSIONS

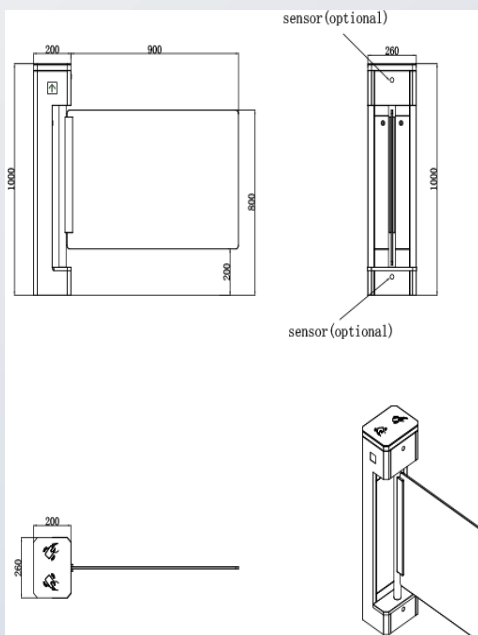

HIGHLIGHTS

- **Durability, high operational reliability, and fast response**
- **LED display (red means no access, green means access)**
- **One-sided or two-sided operation**
- **Indoor and outdoor use**
- **3 year warranty**

Accessories (Optional)

- **iDTRONIC R840 Ethernet**
- **QR Code Reader ID Ident 1500/2000**
- **Remote Control (Wired / Wireless)**
- **3rd party reader installation (z.B. MIFARE, LEGIC, EM, HID etc.)**

TECHNICAL DATA

SPECIFICATION

Dimensions	200 x 260 x 1000mm (L x B x H)
Acrylic Glass Panel	600mm x 850 mm Other sizes on request
Passage Width	≤ 900mm
Material	Stainless steel (304)
Power Supply	AC220V/110V, 50/60Hz
Power Consumption	40W
Operating Voltage	24V DC
Emergency Mechanism	Automatically opening wing doors
Protection Class	IP44
Communication Interface	relay signal
Operating Temperature	-20 °C - 75 °C
Scope of Delivery	<ul style="list-style-type: none"> • Stainless steel Turnstile • Acrylic Glas • Anchor Bolts (M12) + nuts • Wired remote control (for testing only) • Cleaning kit

ACCESSORIES (OPTIONAL)

PRODUCT ACCESSORIES

Accessories (Optional)	<ul style="list-style-type: none"> • iDTRONIC R840 Ethernet • QR Code Reader ID Ident 1500/2000 • Remote Control (Wired / Wireless) • 3rd party reader installation (z.B. MIFARE, LEGIC, EM, HID etc.)
------------------------	--

