




Rugged Industrial Tablet C11 (ATEX)



Windows

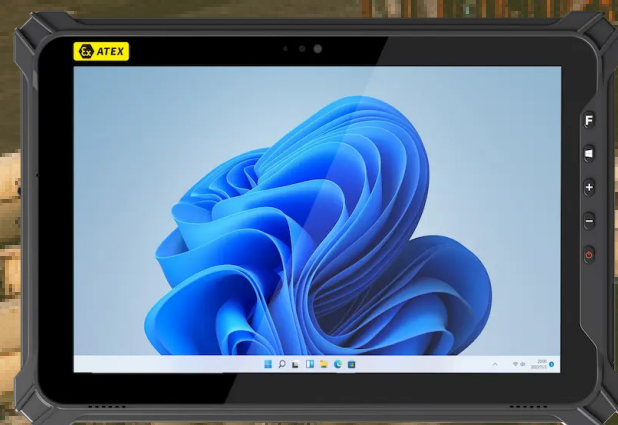

IP65



GNSS



High-capacity battery



Bluetooth



Camera



4G



WiFi



2D



NFC



PERFORMANCE

- Windows 11/10
- Intel® JASPER LAKE N5100
- 8GB RAM + 128GB storage
- 5.000 mAh Battery
- 10.1" Display
- 1920x1200 Resolution

COMMUNICATION

- Extensions Interface: RJ45 (LAN), RS232 (DB9) or USB 2.0 Type-A (selectable)
- 2D Barcode scanner
- WiFi | Bluetooth | 4G | GNSS

FEATURES

- Front 5.0 MP | Rear 8.0 MP camera
- Autofocus with LED Flash
- IP65 certified, MIL-STD-810G certified
- 1.22m Drop - Proof
- Handstrap for mobile use
- ATEX Zone 2/22 certified (II 3G / II 3D)

RFID OPTIONS

- HF, NFC (ISO 14443 A/B, ISO 15693, ISO 18092)

PRODUCT PICTURES



iDTRONIC GmbH
Ludwig-Reichling-Straße 4
67059 Ludwigshafen
GERMANY

Phone: +49 (0)621 66 900 94-0
Mail: info@idtronic.de
Web: idtronic.de

Subject to change without notice.
©2025 iDTRONIC GmbH

TECHNICAL DATA

ELECTRICAL SPECIFICATIONS

Battery	5000mAh rechargeable lithium polymer battery (removeable)
Extension Interface (Choose one)	RJ45 (10/100M) x 1 (standard), DB9 (RS232) x 1, USB 2.0 Type-A x 1
RAM ROM	8GB RAM + 128GB ROM
Storage	128 GB
Reading Distance	2 to 5 cm

MECHANICAL CONDITIONS

Dimensions	274.9 x 188.7 x 23.1mm
Weight	1140 g
Color	Black
CPU	Intel® JASPER LAKE N5100
Camera	Front 5.0MP Rear 8.0MP, autofocus with flash
Display	10.1 inch FHD 16:10, 1920x1200 Resolution 400 nits
Touchscreen	10 dot capacitive screen
Drop Specifications	Within the scope of operation, 6 sides are subjected to the impact of 1.22m falling to the concrete
USB Type	USB 2.0 Type-A x 1, USB Type-C x 1,
Pogo Pin	12PIN Pogo Pin x 1
SIM Card	Nano SIM Card Slot 1x

ENVIRONMENTAL CONDITIONS

Operating Temperature	- 20°C up to 60°C
Storage Temperature	- 30°C up to 70°C
Humidity	95%, non-condensing
Protection Class	IP65

**ATEX Marking: II 3G Ex ic op is IIC T4 Gc /
II 3D Ex ic op is IIIB T130°C Dc**

2D BARCODE IMAGER

Barcode Type	1D: UPC / EAN, Code128, Code 39, Code11, Codabar, Code 2/5 interleaved, MSI, 2D: QR Code, PDF417, Micro QR Code, Aztec Code, MaxiCode
--------------	--

SDK INFORMATION

Supported OS	Windows 11/10
--------------	---------------

SUPPORTED STANDARDS TAGS

RFID HF | NFC 13.56 MHz

ISO 14443 A and compatible	Read/write: MIFARE® Classic/1K/4K, MIFARE Ultralight®/C, MIFARE® DESFire®EV1/3, MIFARE® Smart MX, MIFARE® Plus S / X, MIFARE® Pro X, NTAG 213, 215, 216, 196, DNA Read UID only: all other ISO14443A RFID tags
ISO 14443 B and compatible	SRI4K, SRIX4K, AT88RF020, 66CL160S, SR176
ISO 15693 and compatible	EM4135, EM4043, EM4x33, EM4x35, I-Code SLI / SLIX, I-Code SLI-2, M24LR16/64, TI Tag-it HF-I, SRF55Vxx (my-d vicinity)
ISO 18092	I-Code ILT-M

CERTIFICATE

ATEX certification

ORDER CODES

VERSIONS

HF

C11 Tablet - HF

ORDER CODES

R-HH-C11-HF-ATEX-W11

NFC

C11 Tablet - NFC

R-HH-C11-NFC-ATEX-W11

ACCESSORIES



VEHICLE MOUNT



HAND STRAP



DOCKING CHARGER



BACK STRAP



QUAD CHARGING




19V/3.42A ADAPTER



CAR CHARGER

TP RESIST FILM

APPLICATION RANGE



STOCK MANAGEMENT



CONSTRUCTION FIELD SALES



RETAIL



LOGISTIC APPLICATION

ATEX CERTIFICATE

[illegible]